



Specialists in Filling & Capping

CC560

Our Most Versatile
In-line Capper.



45 Bottles
Per Minute*



320mm Height
140mm Diameter



100mm Diameter



Optional Equipment

- Torque Transducer, measuring up to 10Nm
- Fully Automatic Cap in-feed system with bowl feeders.
- In-line equipment, such as; heat sealers, in/out-feed rotary tables, labellers, powder fillers and much more.
- Servo driven rise and fall, for more accuracy.



Cap Tightening

- Reliable & Repeatable Torque.
- Will work with almost all caps, including; Screw Caps, ROPP, Corks, Trigger Sprays.
- Larger platform for a wider range of bottle sizes. 25ml to 5ltrs.
- Optional trigger spray orientation.
- Easy and quick change parts with anti-static options available.

Touchscreen fitted as standard.



Fitted as standard with a touch screen HMI. Allowing you easy control over functions and the ability to save product settings.



Contact Details:

Telephone: +44 (0)1865 891466
Email: sales@capcoder.com





MADE IN
BRITAIN

Technical Specifications

CC560

Our Most Versatile In-Line Capper

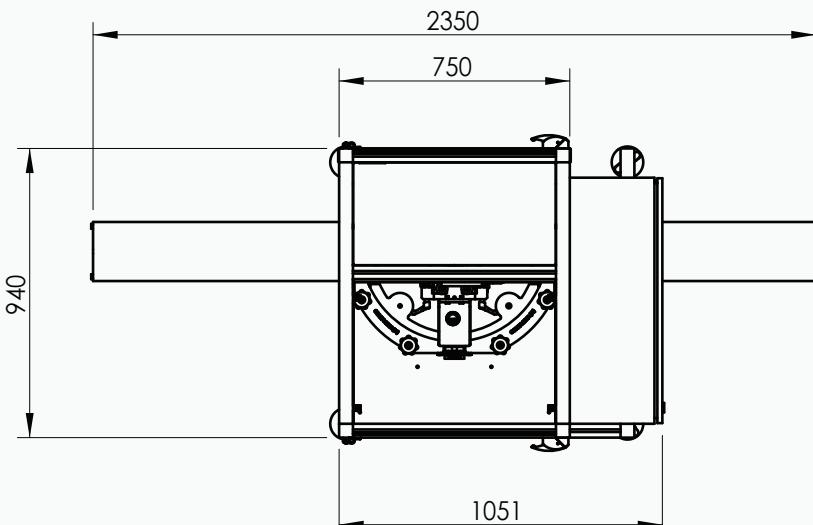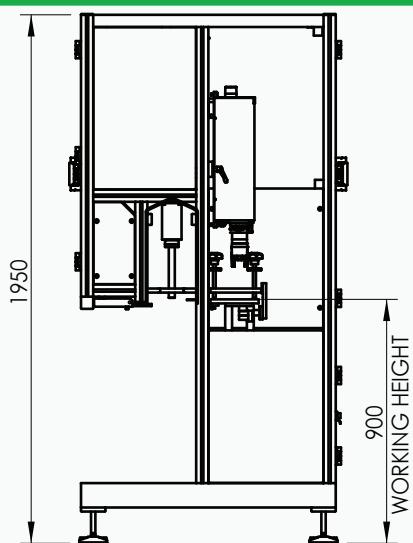

Dimensions & Construction

| | |
|----------------------|--|
| Dimensions | 2350mm(w) x 940mm(d) x 1950mm(h) – with tunnel guarding and no optional extras. |
| Weight | 210Kg – without any optional extras. |
| Build Standard | UKCA or CE Certification. Zone 2 Compatible if operationally required. IP 65 rated. |
| Machine Construction | Anodised aluminium extrusion framework, stainless steel control cabinet, polycarbonate guarding and doors. |
| Options available | Fully stainless steel frame with polycarbonate guarding and doors. |

Machine Options

| | |
|-------------------|--|
| Motors | Standard Brushless Motor Servo Driven Motor Pneumatic Motor |
| Torque Transducer | Two models available 5Nm 10Nm |
| Head Options | Standard 2 or 3 Jaw Torque head Wide Opening Torque Head Pneumatic Crimp Head Press Station ROPP Head |
| Other | Fully automatic variant with many cap in-feed options such as bowl feeders, hoppers or rotary tables. Many out-feed options, including rotary tables, labellers even robotics. |



Contact Details:

Telephone: +44 (0)1865 891466
Email: sales@capcoder.com

 **automate**uk
ppma bara ukiva

 **MADE IN
BRITAIN**

Electrical Information

| | |
|-------------|---|
| Supply | 230v Single phase, supplied via BS 1363 13A Plug, Optional 3 phase* |
| Consumption | 2.8kW |
| Controls | Schneider PLC as standard |

*Supplied via "D" rated MCB, not RCD.

Pneumatic Information

| | |
|-----------------|-------------------------|
| Supply Size | 8mm |
| Supply Pressure | 5 Bar |
| Consumption | Notionally 30 Litre/Min |

Warranty Information



All our machines are covered by a 12 month parts & labour warranty, covering your machine in the unlikely event you have a failure.

For full terms and conditions please see our website.

Want to see the
CC560 in action?



*Machine speed is subject to trials, this speed is a representative example.

**Accuracy is theoretical and dependant on many conditions.

***Representative value, actual amount may vary and is dependant on trials.