



Specialists in Filling & Capping

# Micro Mono

Your new production superhero.



30 Bottles  
Per Minute\*



250mm Height  
66mm Diameter



65mm Diameter



## Liquid Dispensing

- 0.5% Accuracy\*\*
- Gear or peristaltic fillers available.
- Up to 10ltrs/pm\*\*\*
- Suitable for most liquids.
- Quick change filler nozzles.
- Shut off nozzle available.
- Built using 316 grade stainless steel.



## Cap Tightening

- Reliable & Repeatable Torque.
- Will work with almost all caps.
- Available as two or three jaw versions.
- Jaws are designed to suit your caps and are easy to change.
- Capable of orientating trigger or pump sprays.
- Built with reliability in mind.



## Optional Equipment

- Fully Automatic Option, with bowl feeder.
- Outfeed Conveyors.
- Labeller, available in many styles to suit your needs.
- Torque Transducer, measuring up to 10Nm.
- Bottle in-feed pusher table.
- Pneumatic Crimper also available.



## Touch Screen Fitted As Standard



Our Micro Mono is fitted as standard with a touch screen HMI. Allowing you easy control over functions and allowing you to save all your product information in a program, eliminating setup issues.



Contact Details:




Telephone: +44 (0)1865 891466  
Email: sales@capcoder.com



# Technical Specifications

# Micro Mono

Your new production superhero.

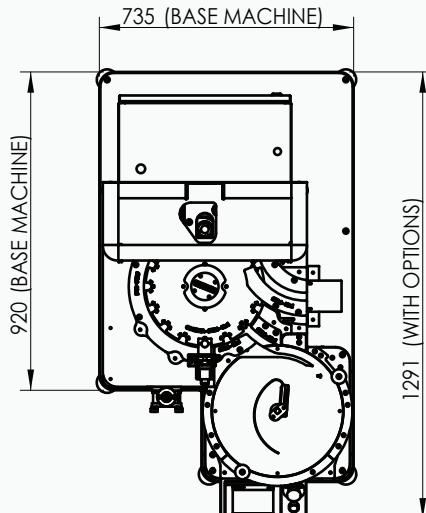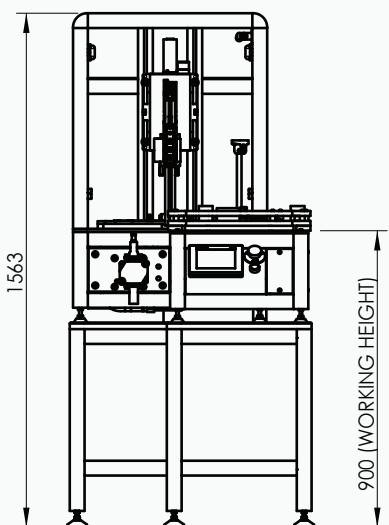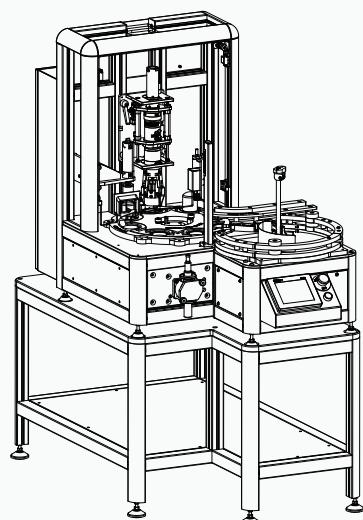

## Dimensions & Construction

Dimensions	735mm(w) x 1291(d) x 1563mm(h) – without any optional extras
Weight	72Kg – without any optional extras.
Build Standard	UKCA or CE Certification. Zone 2 Compatible if operationally required. IP 65 rated.
Machine Construction	Anodised aluminium extrusion framework, stainless steel base cover panels, polycarbonate guarding.
Options available	Fully stainless steel frame with polycarbonate guarding.

## Machine Options

In-feed	Manual Placement Rotary In-feed Table Rotary In-feed Table with Pusher Table
Out-feed	Collation Table Transfer To Labeller Out-feed Conveyor
Fillers	Integrated Peristaltic Pump Integrated Gear Pump Signal output for third party pumping systems.
Automation	Bowl Feeders for bottle & caps. Hoppers & Elevators. Robotics.

## Electrical Information

Supply	230v Single phase, supplied via BS 1363 13A Plug*
Consumption	2.2kW
Controls	Schneider HMI & PLC as standard

\*Supplied via "D" rated MCB, not RCD.

## Pneumatic Information

Supply Size	8mm
Supply Pressure	5 Bar
Consumption	Notionally 20 Litre/Min

## Warranty Information



All our machines are covered by a 12 month parts & labour warranty, covering your machine in the unlikely event you have a failure.

For full terms and conditions please see our website.

Want to see the  
Micro Mono  
in action?



\*Machine speed is subject to trials, this speed is a representative example.

\*\*Accuracy is theoretical and dependant on many conditions.

\*\*\*Representative value, actual amount may vary and is dependant on trials.



Contact Details:

Telephone: +44 (0)1865 891466  
Email: sales@capcoder.com

